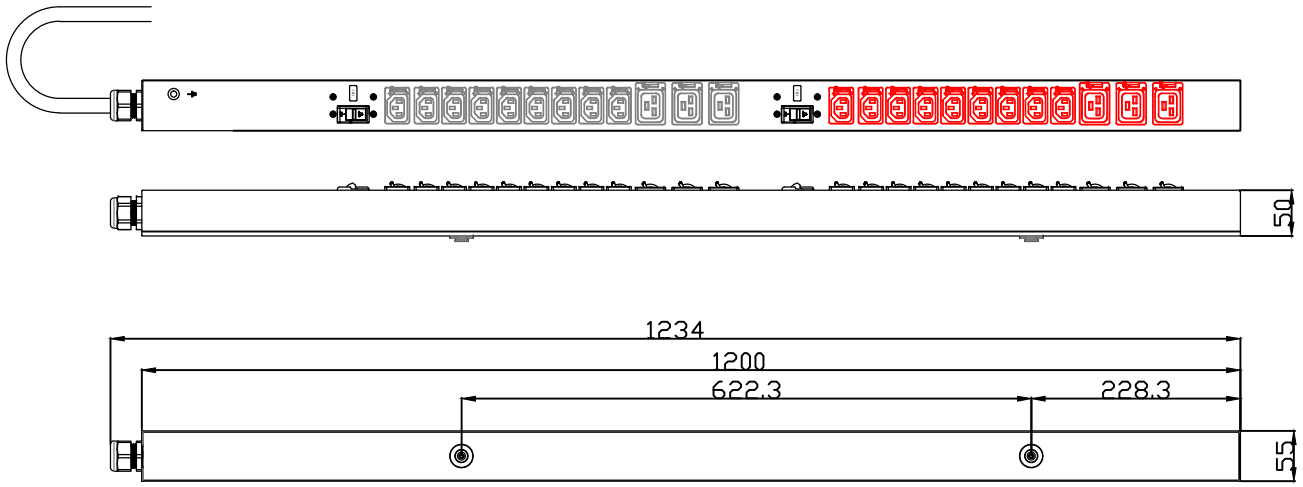

Config Table		
SKU#	Power Cord Length	Plug
AP1102	-	-
AP1102-20	6mm^2x3, 2M	-
AP1102-20P	6mm^2x3, 2M	IEC309 32A 3P6H IP44

PUD Series: Basic
Input: 200-240V AC, 32A. 1Ph
Outlet: C13 [18], C19 [6].
CB/Bank: 16A/1P [2], 2xBank
Outlet Color: Black/RED
Chassics Color: Black



IEC609 PLUG
IP44 32A 3P6H

Toleranss/Tolerance ISO 2768-M
>0.5=3 ±0.1
>3=6 ±0.1
>6=30 ±0.2
>30=120 ±0.3
>120=400 ±0.5
>400=1000 ±0.8

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF A-RACK AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM A-RACK. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

Drawn by
Approved by
Description: Basic PDU, 200-240V AC, 32A. 1Ph C13 [18], C19 [6]
Drawing No.: AP11002
Version: A1
Third Angle Projection
Unit: mm
Scale: 1:-
A4
Sheet:1 OF 1