

KKCB-П-2Э+2x0.75+ support wire

75 Ohm CCTV coaxial Cable

NO.7102219



Construction Parameters:

Inner Conductor	0.37mmCu
Dielectric	2.3mm Solid Polyethylene
Shield	32x0.12mmCCA(45%)
Jacket	3.8mm PVC
Power Wire Conductor	2x(16x0.25mmCCA) Stranded
Power wire Diameter of insulator	2.0mm PVC (Red,Black)
Jacket	5.0mm PE Common
Messenger	1.3mm steel support wire
Application	For Use in Longer CCTV Run Lengths



Electrical Characteristics:


Inner Conductor Resistance	The Max. at 20°C shall be < 166.48 Ω/km
Capacitance	68±1 pF/m
Impedance	75±5 Ω
Return loss	20dB
Velocity of Propagation	0.66
Sparker Test (VAC)	3

Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	3.8x5.0x2.5mm

Cross Section

KKCB-П-2Э+2x0.75+ support wire

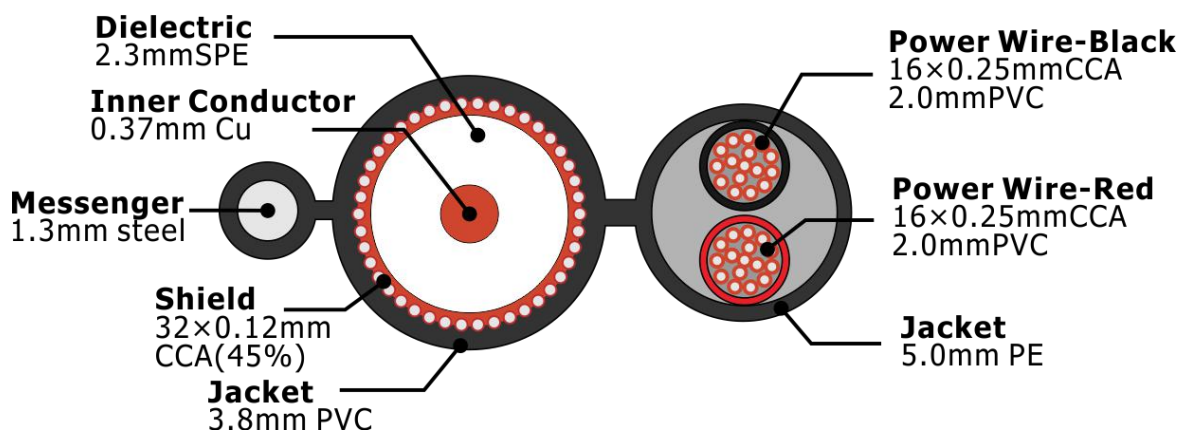

Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)	Max Attenuation (dB/100m)
5		3.69
50		11.62
100		16.50
300		28.42
450		34.81
865		48.25
1000		51.88
1750		68.62
2150		76.06
2500		82.01
3000		89.84

Order Informations:

Marking	HELLOSIGNAL KKCB-П-2Э+2x0.75+ support wire CCTV COAXIAL CABLE 7102219 ×××M/FT
Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service:

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD