



**Signal  
to  
the world**



**CCTV  
Surveillance  
Solutions**

# CCTV Surveillance Solutions



## CCTV coaxial cable description

Surveillance is a primary function in safety and security for many environments such as schools, hospitals, hotels, malls, airports, stations, casinos, prisons, businesses and personals.

The selection of cameras and other electronics equipment is a primary concern, but the link between the electronics should be taken with extreme caution.

ZION COMMUNICATION provides CCTV coaxial cables from short run applications to the most critical long distance applications. Our CCTV coaxial cables offer optimum performance for main distribution use in video surveillance systems where extended cable runs are required.

Our CCTV coaxial cables are available to support most main video surveillance solution brand, such as SONY, HONEYWELL, ARIX, HIKVISION, DAHUA, HELLOSIGNAL and more.

All CCTV Coaxial cables from ZION COMMUNICATION comply with International standards within the industry. And ZION COMMUNICATION CCTV coaxial cable are available as UL and with a CM, CMR or CMP rating, and CPR certificates.

## Why chose us as your partner?

**Price** : We can supply you ultimate reasonable factory price of the CCTV coaxial cable itself.

**Service** : Our export team can give best service on price for import and export, shipping time, documents and custom policy, which will save cost ultimately and create biggest value for you.

**Quality** : Guarantee: Our workers do 100% quality pass testing before we send to our customers; also we are responsible for all products during its normal lifetime.



**HELLOSIGNAL**<sup>TM</sup>  
www.zion-communication.com



# PK75 CCTV COAXIAL CABLE

P1

Catalog No.	Cond.Type &Nom.D.C.R	Dielectric	Shielding& %Coverage	Jacket Type	Nom. Capacitance	Nom.Imp.Ω
PK75-2-110 BC 40% CCA PE NO.7100301	0.37mm (SOL)BC 168.2Ω/km	Solid PE	CCA-Braid 40%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-110 BC 40% BC PE NO.7100302	0.37mm (SOL)BC 168.2Ω/km	Solid PE	BC-Braid 40%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-110 BC 40% CCA PVC NO.7100303	0.37mm (SOL)BC 168.2Ω/km	Solid PE	CCA-Braid 40%	3.30mm PVC	68±1 pF/m	75±5 Ω
PK75-2-110 BC 40% BC PVC NO.7100304	0.37mm (SOL)BC 168.2Ω/km	Solid PE	BC-Braid 40%	3.30mm PVC	68±1 pF/m	75±5 Ω

Catalog No.	Cond.Type &Nom.D.C.R	Dielectric	Shielding& %Coverage	Jacket Type	Nom. Capacitance	Nom.Imp.Ω
PK75-2-13M BC 88% CCA PE NO.7100305	7×0.12mm (STR)BC	Solid PE	CCA-Braid 88%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-13M BC 88% BC PE NO.7100306	7×0.12mm (STR)BC	Solid PE	BC-Braid 88%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-13M BC 88% CCA PVC NO.7100307	7×0.12mm (STR)BC	Solid PE	CCA-Braid 88%	3.30mm PVC	68±1 pF/m	75±5 Ω
PK75-2-13M BC 88% BC PVC NO.7100308	7×0.12mm (STR)BC	Solid PE	BC-Braid 88%	3.30mm PVC	68±1 pF/m	75±5 Ω
PK75-2-111 BC 40% CCA PE NO.7100309	0.37mm (SOL)BC 168.2Ω/km	Solid PE	CCA-Braid 40%	3.80mm PE	68±1 pF/m	75±5 Ω
PK75-2-111 BC 40% BC PE NO.7100310	0.37mm (SOL)BC 168.2Ω/km	Solid PE	BC-Braid 40%	3.80mm PE	68±1 pF/m	75±5 Ω
PK75-2-111 BC 40% CCA PVC NO.7100311	0.37mm (SOL)BC 168.2Ω/km	Solid PE	CCA-Braid 40%	3.80mm PVC	68±1 pF/m	75±5 Ω
PK75-2-111 BC 40% BC PVC NO.7100312	0.37mm (SOL)BC 168.2Ω/km	Solid PE	BC-Braid 40%	3.80mm PVC	68±1 pF/m	75±5 Ω

**HELLOSIGNAL™**

[www.zion-communication.com](http://www.zion-communication.com)



# PK75 CCTV COAXIAL CABLE

P2

Catalog No.	Cond.Type & Nom.D.C.R	Dielectric	Shielding & %Coverage	Jacket Type	Nom. Capacitance	Nom.Imp.Ω
PK75-2-310 BC 45% CCA PE NO.7100317	0.48mm (SOL)BC 98Ω/km	Solid PE	CCA-Braid 45%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-310 BC 45% BC PE NO.7100318	0.48mm (SOL)BC 98Ω/km	Solid PE	BC-Braid 45%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-310 BC 45% CCA PVC NO.7100319	0.48mm (SOL)BC 98Ω/km	Solid PE	CCA-Braid 45%	3.30mm PVC	68±1 pF/m	75±5 Ω
PK75-2-310 BC 45% BC PVC NO.7100320	0.48mm (SOL)BC 98Ω/km	Solid PE	BC-Braid 45%	3.30mm PVC	68±1 pF/m	75±5 Ω
PK75-3-32 BC 88% CCA PVC NO.7100357	0.60mm (SOL)BC 63Ω/km	FPE	CCA-Braid 88%	4.50mm PVC	56.5±1 pF/m	75±5 Ω
PK75-3-32 BC 88% BC PVC NO.7100358	0.60mm (SOL)BC 63Ω/km	FPE	BC-Braid 88%	4.50mm PVC	56.5±1 pF/m	75±5 Ω
PK75-3-32 BC 88% CCA LSZH NO.7100359	0.60mm (SOL)BC 63Ω/km	FPE	CCA-Braid 88%	4.50mm LSZH	56.5±1 pF/m	75±5 Ω
PK75-3-32 BC 88% BC LSZH NO.7100360	0.60mm (SOL)BC 63Ω/km	FPE	BC-Braid 88%	4.50mm LSZH	56.5±1 pF/m	75±5 Ω

Catalog No.	Cond.Type & Nom.D.C.R	Dielectric	1.Shielding	Shielding & %Coverag e	Jacket Type	Nom. Capacitance	Nom.Imp.Ω
PK75-2-122 BC 45% CCA PE NO.7100313	0.37mm (SOL)BC 168.2Ω/km	Solid PE	Al/PET	CCA-Braid 45%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-122 BC 45% BC PE NO.7100314	0.37mm (SOL)BC 168.2Ω/km	Solid PE	Al/PET	BC-Braid 45%	3.30mm PE	68±1 pF/m	75±5 Ω
PK75-2-122 BC 45% CCA PVC NO.7100315	0.37mm (SOL)BC 168.2Ω/km	Solid PE	Al/PET	CCA-Braid 45%	3.30mm PVC	68±1 pF/m	75±5 Ω
PK75-2-122 BC 45% BC PVC NO.7100316	0.37mm (SOL)BC 168.2Ω/km	Solid PE	Al/PET	BC-Braid 45%	3.30mm PVC	68±1 pF/m	75±5 Ω




**HELLOSIGNAL**<sup>TM</sup>  
www.zion-communication.com



# PK75 CCTV COAXIAL CABLE

P3

Catalog No.	Cond.Type & Nom.D.C.R	Dielectric	1.Shielding	Shielding& %Coverag e	Jacket Type	Nom. Capacitance	Nom.Imp.Ω
PK75-2-311 BC 45% TCCA PE NO.7100321	0.48mm (SOL)BC 98Ω/km	Solid PE	Al/PET	TCCA - Braid 45%	3.30mm PE	55±1 pF/m	75±5 Ω
PK75-2-311 BC 45% TC PE NO.7100322	0.48mm (SOL)BC 98Ω/km	Solid PE	Al/PET	TC-Braid 45%	3.30mm PE	55±1 pF/m	75±5 Ω
PK75-2-311 BC 45% TCCA PE NO.7100323	0.48mm (SOL)BC 98Ω/km	Solid PE	Al/PET	TCCA - Braid 45%	3.30mm PVC	55±1 pF/m	75±5 Ω
PK75-2-311 BC 45% TC PE NO.7100324	0.48mm (SOL)BC 98Ω/km	Solid PE	Al/PET	TC-Braid 45%	3.30mm PVC	55±1 pF/m	75±5 Ω
PK75-3-313 Hr(A)-HF BC 65% CCA PVC NO.7100341	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	CCA-Braid 65%	4.50mm PVC	55±1 pF/m	75±5 Ω
PK75-3-313 Hr(A)-HF BC 65% BC PVC NO.7100342	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	BC-Braid 65%	4.50mm PVC	55±1 pF/m	75±5 Ω
PK75-3-313 Hr(A)-HF BC 65% CCA LSZH NO.7100343	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	CCA-Braid 65%	4.50mm LSZH	55±1 pF/m	75±5 Ω
PK75-3-313 Hr(A)-HF BC 65% BC LSZH NO.7100344	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	BC-Braid 65%	4.50mm LSZH	55±1 pF/m	75±5 Ω

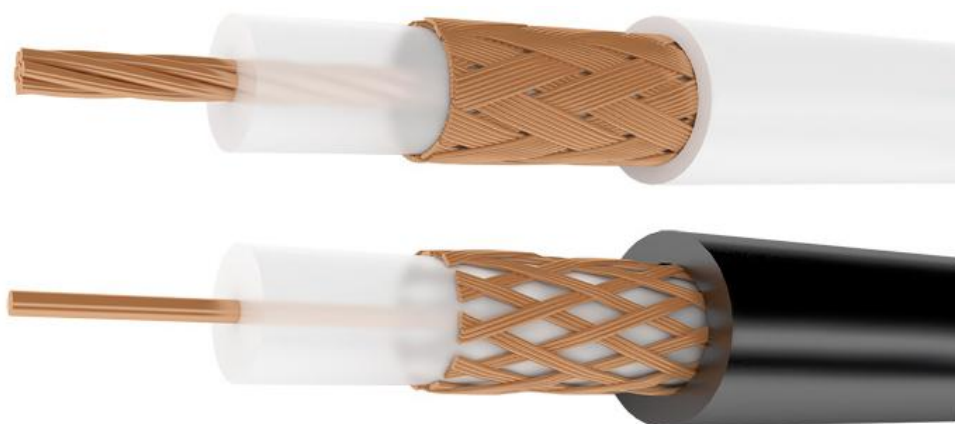

**HELLOSIGNAL™**

[www.zion-communication.com](http://www.zion-communication.com)



# PK75 CCTV COAXIAL CABLE

P4

Catalog No.	Cond.Type & Nom.D.C.R	Dielectric	1.Shielding	Shielding& %Coverage	Jacket Type	Nom. Capacitance	Nom.Imp.Ω
PK75-3-314 hr(A)-HF BC 65% TCCA PVC NO.7100345	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	TCCA - Braid 65%	4.50mm PVC	55±1 pF/m	75±5 Ω
PK75-3-314 hr(A)-HF BC 65% TC PVC NO.7100346	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	<b>TC-Braid 65%</b>	4.50mm PVC	55±1 pF/m	75±5 Ω
PK75-3-314 hr(A)-HF BC 65% TCCA LSZH NO.7100347	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	TCCA - Braid 65%	4.50mm LSZH	55±1 pF/m	75±5 Ω
PK75-3-314 hr(A)-HF BC 65% TC LSZH NO.7100348	0.60mm (SOL)BC 63Ω/km	FPE	Cu/Pet Foil	<b>TC-Braid 65%</b>	4.50mm LSZH	55±1 pF/m	75±5 Ω
PK75-3-315 hr(A)-HF BC 65% CCA PVC NO.7100349	7*0.2mm (STR)BC 63Ω/km	FPE	Cu/Pet Foil	CCA-Braid 65%	4.50mm PVC	56.5±1 pF/m	75±5 Ω
PK75-3-315 hr(A)-HF BC 65% BC PVC NO.7100350	7*0.2mm (STR)BC 63Ω/km	FPE	Cu/Pet Foil	<b>BC-Braid 65%</b>	4.50mm PVC	56.5±1 pF/m	75±5 Ω
PK75-3-315 hr(A)-HF BC 65% CCA LSZH NO.7100351	7*0.2mm (STR)BC 63Ω/km	FPE	Cu/Pet Foil	CCA-Braid 65%	4.50mm LSZH	56.5±1 pF/m	75±5 Ω
PK75-3-315 hr(A)-HF BC 65% BC LSZH NO.7100352	7*0.2mm (STR)BC 63Ω/km	FPE	Cu/Pet Foil	<b>BC-Braid 65%</b>	4.50mm LSZH	56.5±1 pF/m	75±5 Ω
PK75-3-316 hr(A)-HF BC 65% TCCA PVC NO.7100353	7*0.2mm (STR)BC 63Ω/km	FPE	Cu/Pet Foil	TCCA - Braid 65%	4.50mm PVC	56.5±1 pF/m	75±5 Ω
NO.7100354 PK75-3-316 hr(A)-HF BC 65% TC PVC	7*0.2mm (STR)BC 63Ω/km	FPE	Cu/Pet Foil	<b>TC-Braid 65%</b>	4.50mm PVC	56.5±1 pF/m	75±5 Ω
PK75-3-316 hr(A)-HF BC 65% TC LSZH NO.7100356	7*0.2mm (STR)BC 63Ω/km	FPE	Cu/Pet Foil	<b>TC-Braid 65%</b>	4.50mm LSZH	56.5±1 pF/m	75±5 Ω

# PK75 CCTV COAXIAL CABLE

P5

Catalog No.	Cond.Type &Nom.D.C.R	Dielectric	1.Shielding	Shielding& %Coverag e	Jacket Type	Nom. Capacitance	Nom.Imp.Ω		
PK75-3-322 PK75-3-312 TCCA PVC NO.7100361	0.60mm (SOL)BC 63Ω/km	FPE	Al/PET	TCCA - Braid <u>51%</u>	4.50mm PVC	56.5±1 pF/m	75±5 Ω		
PK75-3-322 PK75-3-312 TC PVC NO.7100362	0.60mm (SOL)BC 63Ω/km	FPE	Al/PET	<b>TC-Braid</b> <u>51%</u>	4.50mm PVC	56.5±1 pF/m	75±5 Ω		
PK75-3-322 PK75-3-312 TCCA LSZH NO.7100363	0.60mm (SOL)BC 63Ω/km	FPE	Al/PET	TCCA - Braid <u>51%</u>	4.50mm LSZH	56.5±1 pF/m	75±5 Ω		
PK75-3-322 PK75-3-312 TC LSZH NO.7100364	0.60mm (SOL)BC 63Ω/km	FPE	Al/PET	<b>TC-Braid</b> <u>51%</u>	4.50mm LSZH	56.5±1 pF/m	75±5 Ω		
Coaxial Cable					Power Cores				
Catalog No.	Cond.Type &Nom.D.C.R	Dielectric	Shielding& %Coverage	Jacket	Power Wire Cond.Type	Power wire OD of insulation	Jacket	Nom. Capacitance	Nom.Imp.Ω
KX6 +2×0.50 Figure 8 NO.7102071	7×0.2mm (STR) Copper 87.5 Ω/km	Foam FEP	96/0.12CCA	6.00mm PVC/PE/LS ZH	2x (16*0.20mm CCA )	1.6mm PVC (Red,Black)	<b>4.40mm</b> <b>PVC/PE/</b> <b>LSZH</b>	69±4 pF/m	75±3Ω
KX6 +2×0.75 Figure 8 NO.7102072	7×0.2mm (STR) Copper 87.5 Ω/km	Foam FEP	96/0.12CCA	6.00mm PVC/PE/LS ZH	2x (24*0.2mm CCA )	<b>2.0mm PVC</b> <b>(Red,Black)</b>	5.10mm PVC/PE/ LSZH	69±4 pF/m	75±3Ω
KX6 CU +2×0.75 Figure 8 NO.7102073	7×0.2mm (STR) Copper 87.5 Ω/km	Foam FEP	<b>96/0.12CU</b>	6.00mm PVC/PE/LS ZH	<b>2x</b> <b>(24*0.2mmCu)</b>	<b>2.0mm PVC</b> <b>(Red,Black)</b>	5.10mm PVC/PE/ LSZH	69±4 pF/m	75±3Ω
KX6 +2×0.50 Figure 8 Full NO.7102074	<b>7×0.19mm</b> <b>(STR) Copper</b> <b>87.5 Ω/km</b>	Foam FEP	96/0.12CCA	<b>5.80mm</b> <b>PVC/PE/LS</b> <b>ZH</b>	2x (16*0.20mm CCA)	1.8mm PVC (Red,Black)	<b>3.1×4.8mm</b> <b>PVC/PE/</b> <b>LSZH</b>	69±4 pF/m	75±3Ω



**HELLOSIGNAL**<sup>TM</sup>  
www.zion-communication.com



# PK75 CCTV COAXIAL CABLE

P6

Coaxial Cable					Power Cores				
Catalog No.	Cond.Type & Nom.D.C.R	Dielectric	Shielding & %Coverage	Jacket	Power Wire Cond.Type	Power wire OD of insulation	Jacket	Nom. Capacitance	Nom.Imp.Ω
KBK-B-1,5 +2x0.35, Figure 8 NO.7102206	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (7x0.25mm CCA )	1.7mm PVC (Red,Black)	4.4mm PVC Figure 8	68 ±3 pF/m	75±3Ω
KBK-B-1,5 +2x0.50, Figure 8 NO.7102207	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (11x0.25mm CCA)STR	1.8mm PVC (Red,Black)	4.6mm PVC Figure 8	68 ±3 pF/m	75±3Ω
KBK-B-1,5 +2x0.75, Figure 8 NO.7102208	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (16x0.25mm CCA)STR	2.0mm PVC (Red,Black)	5.0mm PVC Figure 8	68 ±3 pF/m	75±3Ω
Catalog No.	Cond.Type & Nom.D.C.R	Dielectric	Shielding & %Coverage	Jacket	Power Wire Cond.Type	Power wire OD of insulation	Jacket	Nom. Capacitance	Nom.Imp.Ω
KKCB-П-1,5 +2x0.50, Figure 8 NO.7102215	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (11x0.25mm CCA)STR	1.8mm PVC (Red,Black)	4.6mm PE Figure 8	68 ±3 pF/m	75±3Ω
KKCB-П-1,5 +2x0.75, Figure 8 NO.7102216	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (16x0.25mm CCA)STR	2.0mm PVC (Red,Black)	5.0mm PE Figure 8	68 ±3 pF/m	75±3Ω
KBK-B-2Θ +2x0.75, Figure 8 NO.7102209	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 90%	3.8mm PVC	2x (16x0.25mm CCA)STR	2.0mm PVC (Red,Black)	5.0mm PVC Common	68 ±3 pF/m	75±3Ω
KKCB-П-2Θ +2x0.50, Figure 8 NO.7102217	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 90%	3.8mm PVC	2x (16x0.25mm CCA)STR	1.8mm PVC (Red,Black)	4.6mm PE Figure 8	68 ±3 pF/m	75±3Ω
KBK-B-2Θ +2x0.75, Figure 8 NO.7102218	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 90%	3.8mm PVC	2x (16x0.25mm CCA)STR	2.0mm PVC (Red,Black)	5.0mm PE Figure 8	68 ±3 pF/m	75±3Ω





# PK75 CCTV COAXIAL CABLE

P7


Coaxial Cable					Power Cores			Messenger	Nom. Capacitance & Nom.Imp.Ω
KBK-Π-2Θ +2x0.75 +support wire NO.7102214	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 90%	3.8mm PVC	2x (16x0.25mm CCA)STR	2.0mm PVC (Red,Black)	5.0mm PE Common	1.3mm Steel	68±1pF/m 75±3Ω
Coaxial Cable					Power Cores		Overall OuterSheath		
Catalog No.	Cond.Type &Nom.D.C.R	Dielectric	Shielding& %Coverage	Jacket	Power Wire Cond.Type	Power wire OD of insulation	Jacket	Nom. Capacitance	Nom. Imp.Ω
KBK-B-1,5 +2x0.35, Common NO.7102201	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (7x0.25mm CCA )	1.7mm PVC (Red,Black)	6.1mm PVC Common	68 ±3 pF/m	75±3Ω
KBK-B-1,5 +2x0.50, Common NO.7102202	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (11x0.25mm CCA )STR	1.8mm PVC (Red,Black)	6.2mm PVC Common	68 ±3 pF/m	75±3Ω
KBK-B-1,5 +2x0.75, Common NO.7102203	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (16x0.25mm CCA )STR	2.0mm PVC (Red,Black)	6.4mm PVC Common	68 ±3 pF/m	75±3Ω
KBK-Π-1,5 +2x0.50, Common NO.7102210	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (11x0.25mm CCA )STR	1.8mm PVC (Red,Black)	6.2mm PE Common	68 ±3 pF/m	75±3Ω
KBK-Π-1,5 +2x0.75, Common NO.7102211	0.25mm (SOL)Cu 350 Ω/km	Solid PE	CCA -Braid 90%	3.1mm PVC	2x (16x0.25mm CCA )STR	2.0mm PVC (Red,Black)	6.4mm PE Common	68 ±3 pF/m	75±3Ω
Coaxial Cable					Power Cores		Overall OuterSheath		
Catalog No.	Cond.Type &Nom.D.C.R	Dielectric	Shielding& %Coverage	Jacket	Power Wire Cond.Type	Power wire OD of insulation	Jacket	Nom. Capacitance	Nom. Imp.Ω
KBK-B-2Θ +2x0.75, Common NO.7102205	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 45%	3.8mm PVC	2x (16x0.25mm CCA )STR	2.0mm PVC (Red,Black)	7.3mm PVC Common	68 ±3 pF/m	75±3Ω
KBK-Π-2Θ +2x0.50, Common NO.7102212	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 45%	3.8mm PVC	2x (11x0.25mm CCA )STR	1.8mm PVC (Red,Black)	7.1mm PE Common	68 ±3 pF/m	75±3Ω
KBK-Π-2Θ +2x0.75, Common NO.7102213	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 45%	3.8mm PVC	2x (16x0.25mm CCA )STR	2.0mm PVC (Red,Black)	7.3mm PE Common	68 ±3 pF/m	75±3Ω
Catalog No.	Cond.Type &Nom.D.C.R	Dielectric	Shielding& %Coverage	Inter Jacket	Power Wire Cond.Type	Power wire OD of insulation	Outer Jacket	Messenger	Nom. Capacitance & Nom.Imp.Ω
KBK-Π-2Θ +2x0.75 +support wire NO.7102214	0.37mm (SOL)Cu 166.48 Ω/km	Solid PE	CCA -Braid 45%	3.8mm PVC	2x (16x0.25mm CCA)STR	2.0mm PVC (Red,Black)	5.0mm PE Common	1.3mm Steel	68±1pF/m 75±3Ω

# Category Video Over UTP Cables

P8

# Category Video-Power Over UTP Siamese Cables

Catalog No.	Cond.Type	Inter Jacket	Cotton Rip Cord	Outer Jacket	Nom. Capacitance	Nom.Imp.Ω			
U/UTP CAT 5E BC PVC NO.7112102	4×2×(24AWG (SOL) BC )	0.91mm HDPE	Cotton Rip Cord	5.1mm PVC	46pf/KM	100			
U/UTP CAT 5E BC PVC CM NO.7112103	4×2×(24AWG (SOL) BC )	0.91mm HDPE	Cotton Rip Cord	5.1mm PVC CM	46pf/KM	100			
U/UTP CAT 5E BC PVC CM NO.7112108	4×2×(24AWG (SOL) CCA )	0.91mm HDPE	Cotton Rip Cord	5.1mm PVC	46pf/KM	185			
Catalog No.	Cond.Type	Inter Jacket	Cotton Rip Cord	Outer Jacket	Power Wire Cond.Type	Power wire OD of insulation	Outer Jacket	Nom. Capacitance	Nom.Imp.Ω
U/UTP CAT5E BC+2C18AWG PVC NO.7102302	4×2×(24AWG (SOL) BC )	0.91mm HDPE	Cotton Rip Cord	5.1mm PVC	2× (7×0.38mm BC)	1.9mm PVC (Red,Black)	5.0mm PVC	46pf/KM	100
U/UTP CAT5E BC+2C18AWG PVC CM NO.7102303	4×2×(24AWG (SOL) BC )	0.91mm HDPE	Cotton Rip Cord	5.1mm PVC CM	2× (7×0.38mm BC)	1.9mm PVC (Red,Black)	5.0mm PVC CM	46pf/KM	100
U/UTP CAT5E CCA +2C18AWG PVC NO.7102305	4×2×(24AWG (SOL) CCA )	0.91mm HDPE	Cotton Rip Cord	5.1mm PVC	2× (7×0.38mm CCA)	1.9mm PVC (Red,Black)	5.0mm PVC	46pf/KM	185

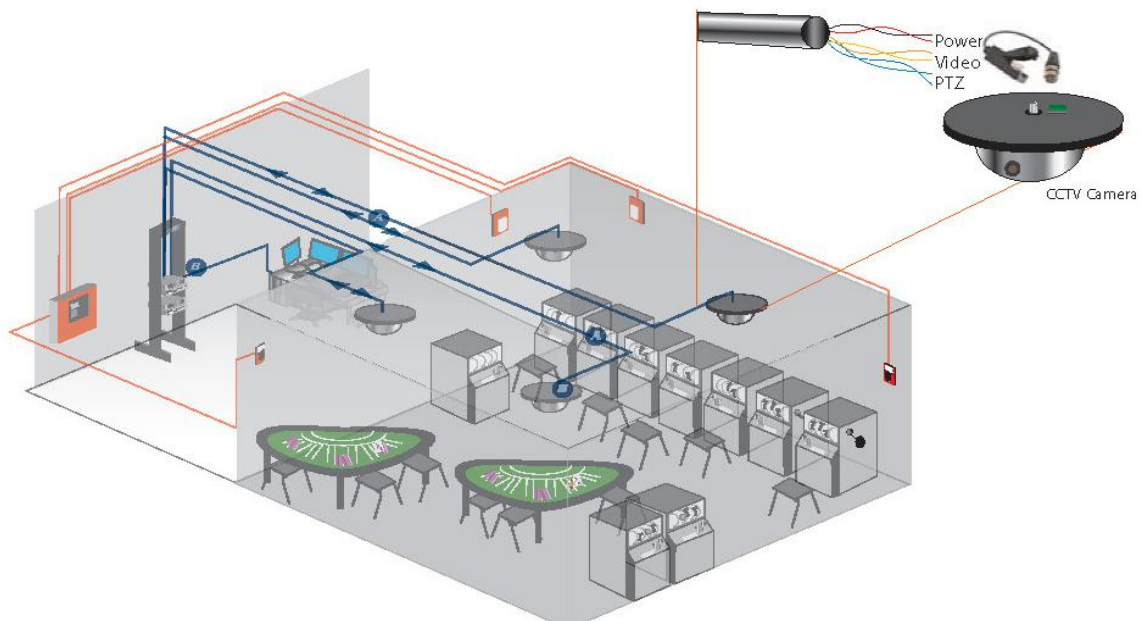

**HELLOSIGNAL**<sup>TM</sup>  
www.zion-communication.com



# CCTV Accessories

P9



**BNC male quick crimp**  
7020000



**BNC female to BNC female**  
7020001



**BNC male to double BNC female**  
7020002



**BNC male to RCA female**  
7020003



**BNC male twist on**  
7020004



**BNC male copper**  
7020005



**BNC male**  
7020006



**BNC male solderless**  
7020007



**Right Angle BNC female**  
7020008

**HELLOSIGNAL™**  
www.zion-communication.com

**ZION**  
Communication

# CCTV Accessories

P10



BNC female w spring  
7020009



BNC male to RCA male  
7020010



Femal 2.1mmx5.5mm quick type  
7020011



Femal 2.1mmx5.5mm with  
terminal block  
7020012



Mail 2.1mmx5.5mm with  
splited terminal block  
7020013



Mail 2.1mmx5.5mm with splited  
terminal block  
7020014



Mail RCA with terminal bloc  
7020015



DC plug  
7020016



BNC Plug to double  
7020017

**HELLOSIGNAL**<sup>TM</sup>  
www.zion-communication.com



# CCTV Accessories

P11



BNC Female to double binding post  
7020018



RCA Female  
7020019



BNC Plug  
7020020



BNC Plug  
7020021



Mail 2.1mmx5.5mm+cable 2x0  
7020022

