

RM SERIES RELAY MODULE

- ★Easily plug and pull
- ★Support load 16A
- ★Support NPN/PNP

ORDERING INFORMATION :

Example : RM02-G1D24

2 Group Type, 1 Form C, Coil Voltage DC24V

MODULE SERIES	RM	02	-	L1	D24
GROUP TYPE					
1/ 2/ 4/ 6/ 8/ 10/ 12/ 14/ 16/ 32					

RELAY TYPE	
L1:LMP1H(16A 250VAC/30VDC)	
L2:LMP2 (8A 250VAC/30VDC)	

RELAY COIL VOLTAGE	
D12:DC12V;D24:DC24V	
A110:AC110V;A220:AC220V	


PRODUCT FEATURES

- Support min 1 group to max 32 group type relay module ;
- LMP1H/LMP2 relays can be plug in, load capacity 8A/16A 250VAC , 30VDC(RES.) with TUV、UL.etc certificate ;
- Relay installation : Terminal Input, NPN/PNP, AC/DC ;
- Output type : 1 Form, 2 Form ;
- Each set having an independent LED to show operating status and surge protection circuit ;
- Output has overvoltage protection ;
- Bottom instalment support TS 15/28/35 guide rails ;

APPLICATION

Used for PLC output load current amplification and isolation protection, Instal in PLC, Single-chip control board, time relay, buttons and digital output controllers , Amplify the output current of the control, used for high-power load equipment, to protect the core control system.

WIRING DIAGRAM

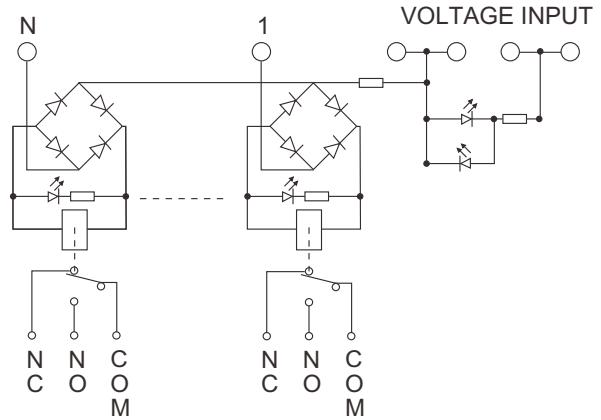

DIMENSIONS

GROUP TYPE	ORDERING INFO	SIZE (mm)
2	RM02-G□D24	40×85×70
4	RM04-G□D24	70×85×70
6	RM06-G□D24	100×85×70
8	RM08-G□D24	130×85×70
10	RM10-G□D24	160×85×70
12	RM12-G□D24	190×85×70
14	RM14-G□D24	220×85×70
16	RM16-G□D24	250×85×70
32	RM32-G□D24	250×170×70